



X20E Electric Conveyor Oven



Conveyor Width
20"




Cooking Chamber
20"

PRINCIPLE

The X20E Conveyor offers all of the power and technology you would expect from Middleby Marshall, but in a space-saving countertop high-volume design. It produces faster cooking, a smaller footprint, and does not require the energy consumption and higher HVAC needs of larger ovens.

STANDARD FEATURES

- 20" cooking chamber, 20" wide belt
- Variable-speed High h recirculating impingement airflow system
- Stackable design up to 2 high (requires stacking kits)
- Variable-speed blower motors
- Easy to clean mono-finger design
- Built-in self diagnostics for monitoring oven components
- Left or right feed conveyor belt direction via software
- Two (2) 6" conveyor extensions included
- OneTouch Control
- Independently controlled upper and lower air impingement

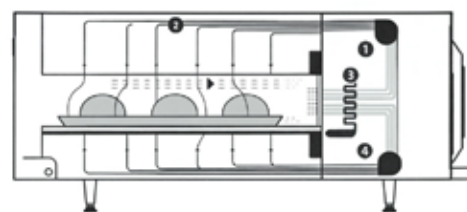

1. Blower motor
2. Impinged air
3. Impingement heater
4. Conveyor motor



Please note, due to ongoing product development and improvement, we reserve the right to change product design and specification at any time without notice.

MIDDLEBY
AUSTRALIA

**HEAD OFFICE
AND MANUFACTURING PLANT**
211-217 Woodpark Road
Smithfield NSW 2164

VIC - TAS
47 Stubbs Street,
Kensington
VIC 3031

QLD
U12, 210 Queensport
Rd Nth, Murarrie
QLD 4172


WA
U2, 9 Meares Way,
Canning Vale
WA 6155

1800 013 123
+61 2 9604 7333
sales@middleby.com.au
middleby.com.au


v1_2026

X20E


ELECTRIC CONVEYOR OVEN

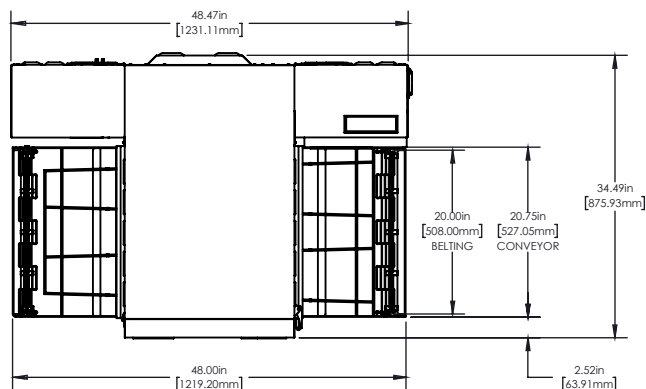


X20 Top View

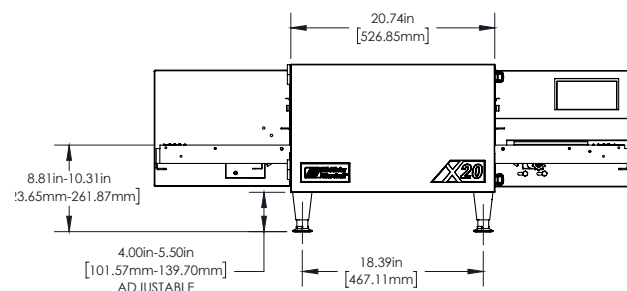

X20 Front View

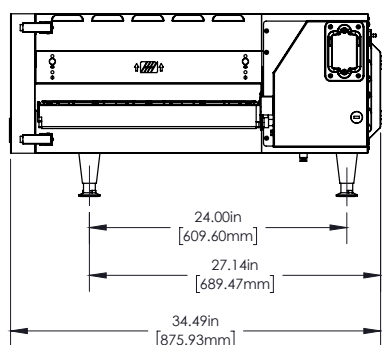

X20 Side View

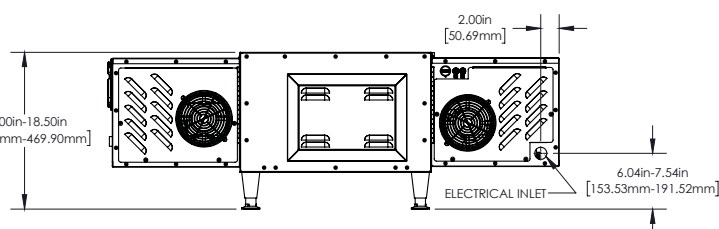

X20 Rear View

SPECIFICATIONS

Heating Zone	508 mm
Baking Area	0.27 m ²
Bake Operating Temperature	288°C
Time Range	6 seconds - 15.5 minutes
Overall Length	1229 mm
Belt Width	508 mm
Belt Length	1227 mm
Height	432 mm
Depth	912 mm
Crated Weight	105 kg

ELECTRICAL REQUIREMENTS

Voltage, Phase	380-415 V CE 3
Frequency	50/60 Hz
Current draw	20A
Amperage L1, L2, L3, N	20.7A, 10.3A, 10.3A, 10.3A
Supply	5-wire (3L+N+G)
Breakers	32 A

Power lead and plug required (not included).

WALL CLEARANCE TO COMBUSTIBLE CONSTRUCTION

Rear of Conveyor to Wall	none
Control End to Wall	none
Non-control Clearance	none

Please note, due to ongoing product development and improvement, we reserve the right to change product design and specification at any time without notice.

**HEAD OFFICE
AND MANUFACTURING PLANT**
211-217 Woodpark Road
Smithfield NSW 2164

VIC - TAS
47 Stubbs Street,
Kensington
VIC 3031

QLD
U12, 210 Queensport
Rd Nth, Murarrie
QLD 4172

WA
U2, 9 Meares Way,
Canning Vale
WA 6155

**MIDDLEBY
AUSTRALIA**

**1800 013 123
+61 2 9604 7333
sales@middleby.com.au
middleby.com.au**

v1_2026