



# Eswood Professional Warewasher



Professional Undercounter Warewasher



## Eswood


### **Recirculating Undercounter Warewasher**

UC25NDP is a compact recirculating dishwasher that suits all popular wash rack sizes. It is a fully automatic operation with a simple 'start' button after selecting the wash cycle.

Upper and lower wash arms with multiple jets has been designed to ensure maximum wash and rinse coverage. The boost heater is thermostatically controlled and interlocked to machine operation to ensure correct sanitising every time.

New is the drain pump, detergent pump and rinse aid injector fitted as standard. All new digital wash & rinse temperature displays for easy temperature recording in controlled environments.

The UC25NDP conforms to the highest of health and sanitary standards, meeting FSANZ safe food codes and certifications in HACCP and WaterMark.



211–217 Woodpark Road SMITHFIELD NSW 2164 T: 1800 013 123 E: sales@middleby.com.au





U	p to :	500	plates	per	hour
<u> </u>			plates		i lo ui

Full width tank strainers and dual filtration

3 Wash programs to match degree of soil

Durable stainless-steel body construction and wash arms

Integrated drain pump as standard

Detergent pump and Rinse aid injector as standard

Safety cut-off fitted to door

Easily removable spray arms and filters

Accommodates 500 x 500 mm baskets

Accurate Digital wash & rinse temperature controllers and displays

middleby.com.au


211–217 Woodpark Road SMITHFIELD NSW 2164 **T:** 1800 013 123 **E:** sales@middleby.com.au





A. Drain connection 25mm OD x 20mm ID at 1.8m hose

B. Hot Water Connection 3/4" BSP x 1.5m braided hos

C. Electrical connection 2m 240V 15A plug

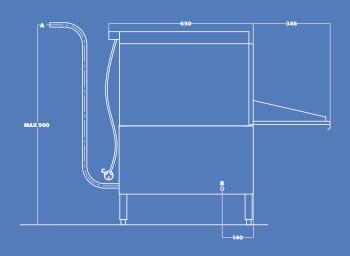





## UC25NDP

#### **Professional Undercounter Warewasher**

#### **UC25NDP Specifications**

DIMENSIONS (WxDxH)	605 x 670 x 875 mm		
DEPTH WITH DOOR OPEN	1000 mm		
RACK SIZE – G74N (WxD)	500 x 500 mm		
WEIGHT	68 kg		
ELECTRIC CONNECTION	15A Single Phase - 240V		
RATING	3.6 kW		
WATER SUPPLY	65°C / 2-4 bar (28-58 psi)		
PACKED	0.3m <sup>3</sup>		
MEAL SERVICE	30 – 60 pax		
	60 sec		
WASH CYCLE	85 sec		
	115 sec		
DETERGENT PUMP	Fitted		
RINSE AID INJECTOR	Fitted		
DRAIN PUMP	Fitted		
WATER CONSUMPTION	3.5L Hot Cycle		
TANK CAPACITY	18L		
WATERMARK APPROVAL	WM-022833		
HACCP APPROVAL	PE-388-GE-09		

Dimensions may change without notice in accordance with product development and design

**Proudly Distributed By** 

middleby.com.au

211–217 Woodpark Road SMITHFIELD NSW 2164 **T:** 1800 013 123 **E:** sales@middleby.com.au



